

Mega metal

d.o.o.

DOUBLE-DISC FERTILIZER SPREADERS RG 1000 – RG 1200– RG 1500

MEGA METAL d.o.o.

www.megametal.hr

HEADQUARTERS

ADDRESS:

Varaždinska 45
40305 Nedelišće
CROATIA

PRODUCTION FACILITY

ADDRESS:

Sajmišna bb
40329 Kotoriba
CROATIA

CONTACT INFORMATION:

Tel.: + 385 040/682 -182

Tel./fax: + 385 040/821-108

Email: info@megametal.hr

komercijala@megametal.hr

CEO:

Tomica Novak

uprava@megametal.hr




PLASTICISED
SPREADER



STAINLESS STEEL
SPREADER

- Fertilizer spreader (RG) is intended for spreading dry fertilizer and granulated fertilizer.
- It is constructed to enable uniform distribution in the entire width, and separately on the left and right sides.
- The spreader can also be used for sowing wheat and other crops.

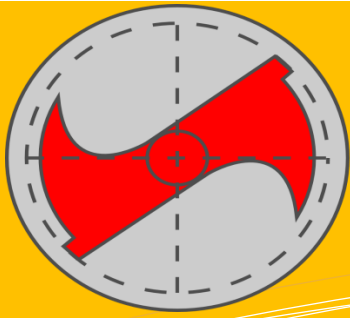

Mega metal

d.o.o.

The basic structural units of the fertilizer spreader are:

- Frame
- Tank (funnel)
- Spreading width regulations hydraulic mechanism
- 2 discs
- Shielding
- Reducers



Fertilizer spreader was designed to be carried by, i.e., connected to the tractor by a Cardan axis with a maximum of 540 r/min, and a three (3) point connection system.



- The spreader is equipped with a hydraulic opening system, and the fertilizer quantity adjustment must be executed manually by placing the lid lever into desired position for each disc separately.



	RG 1000	RG 1200	RG 1500
Dimensions: length (mm)	1980	1980	1980
- width (mm)	1250	1250	1250
- height (mm)	1000	1090	1230
Volume (litre):	1000	1200	1500
Weight (kg):	240	260	273
Bearing capacity (kg):	950	1140	1425
Scattering – spreading width (m):	12-20	12-20	12-20
Maximum number of rotations of the propulsion shaft (r/min)	540	540	540
Operational speed (km/h)	5-15	5-15	5-15
Minimum necessary power-tractor (kw)	50	50	50