

Mega metal

d.o.o.

FLAIL TOPPER

UML 150 - UML 170 - UML 190

Mega metal
d.o.o.

HEADQUARTERS

ADDRESS:

Varaždinska 45
40305 Nedelišće
CROATIA

PRODUCTION FACILITY

ADDRESS:

Sajmišna bb
40329 Kotoriba
CROATIA

CONTACT INFORMATION:


Tel.: + 385 040/682 -182

Tel./fax: + 385 040/821-108


Email: megametal@ck.t-com.hr
info@megametal.hr

CEO:

Tomica Novak

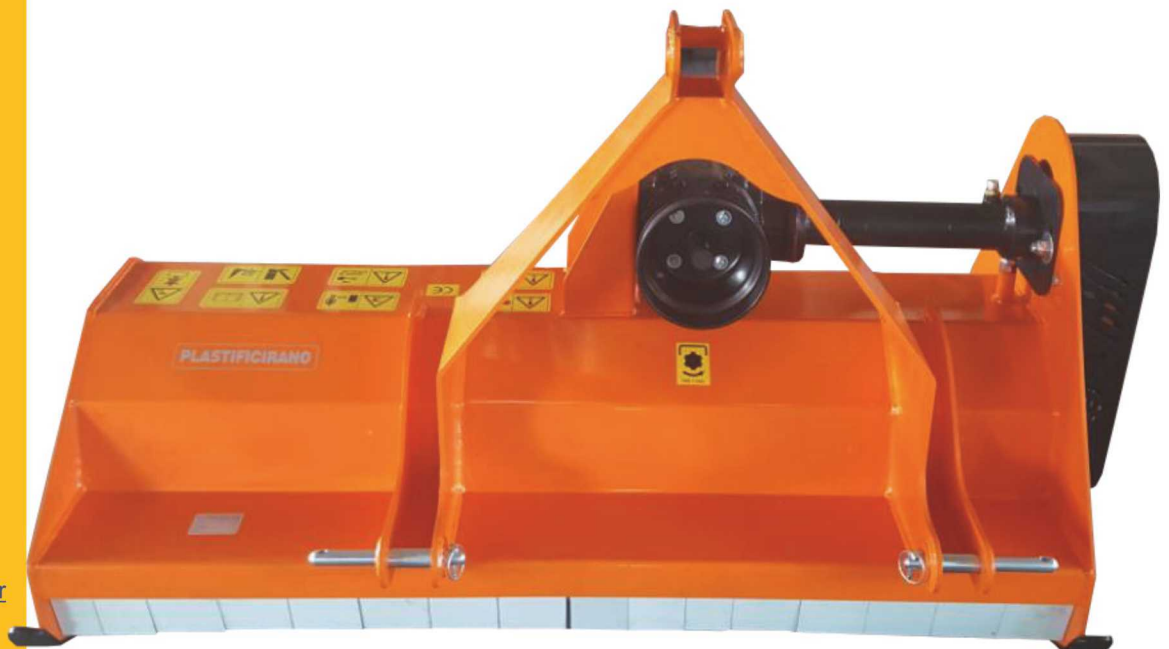

- Topper is intended for use in all agricultural surfaces, for maintenance of green areas and neglected fields.
- It can be used to mulch harvest waste material as well as branches up to 4 cm thick.
- The topper is of robust construction and is intended for intensive use.
- Topper is propelled from the tractor via cardan joint to reducer connection axis, from the transition axis to cogwheel in the reducer casing and through those to flails.



Mega metal

d.o.o.



STANDARD EQUIPMENT:

- Flails
- Gliders - sledge adjustable by height
- Rear roller - adjustable by height

TEHNIICAL DATA

MODEL	LEINGHT -cm	WIDTH -cm	HEIGHT -cm	NUMBERS OF FLAILS	OPERATIONAL WIDTH -cm	MIN. TRACTOR POWER KS/KW	WEIGHT -KG
UML 150	93	170	98	15	150	30 KS / 22 KW	276
UML 170	93	190	98	16	170	35 KS / 26 KW	298
UML 190	93	210	98	18	190	40 KS / 30 KW	320